

## Perfect Flush Fit Information

- The Perfect Flush will install on 99% of 1 and 2 piece tank toilets (Flapper Style).
- Perfect Flush is adjustable to work with 1.28, 1.6, 3.5, 5+ gallon flushing toilet fixtures.
- The incoming water supply line should be a flexible hose. If it is a rigid pipe, it will need to be replaced with a flexible supply hose.
- Please see the following for specific fill valve requirements:

### Pilot Fill Valve:

**YES**, the Perfect Flush will fit with all pilot style fill valve toilets. (figure 1)

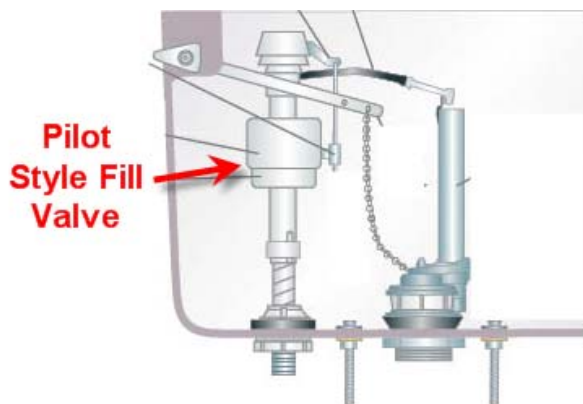



Figure 1

### Ball-cock Fill Valve:

In most instances, the Perfect Flush will fit with ball-cock fill valves. There needs to be ample space on one side or the other of the overflow tube for the Perfect Flush Lifter Assembly. (figure 2)

In some cases, it may be necessary to replace the ball-cock fill valve with a pilot fill valve.

Space needed left or right of flush valve for Perfect Flush

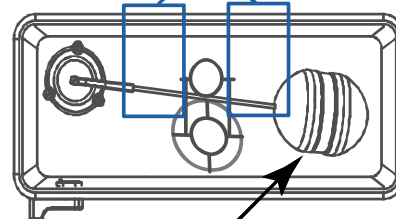

**Ball-cock Fill Valve**

Figure 2

### Perfect Flush is Not Compatible With:

Tower-style (centered) Flush Valve Systems (figure 3)

Flapper-less Flush Valves

Pressure Assist Flush Systems



Figure 3