


# Brondell®

## Swash CL2200 Luxury Bidet Toilet Seat with Remote Control

**Models:** CL2200-EW, CL2200-RW

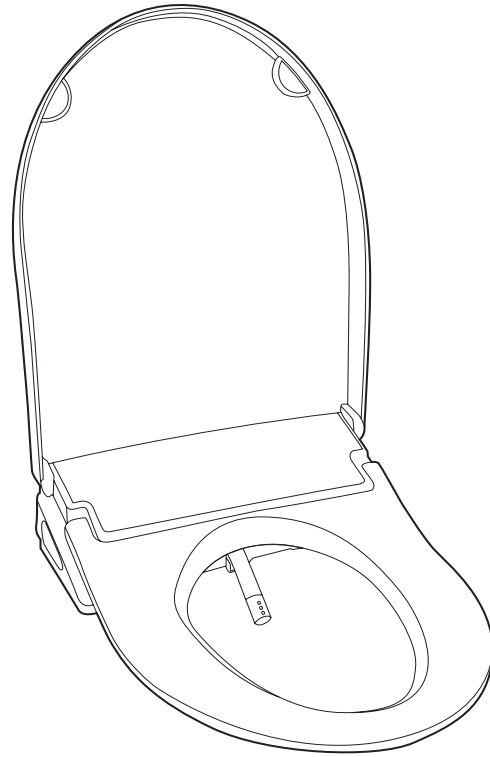

### Features

- Adjustable, 5-position stainless steel nozzle
- Nozzle oscillation, gentle, and strong wash modes
- Fully adjustable water pressure and temperature
- Three-level heated seat and 5-level warm air dryer with temperature control
- Ceramic water heater system
- Activated carbon deodorizer
- Gentle-close, sit-upon seat and lid
- Multicolored LED nightlight
- Wireless remote control
- On-demand, self-cleaning nozzle
- 3-year limited warranty provided by US-based customer service team

### Technical Specifications

Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	1470 W
Power Cord Length	47.24" / 119.98 cm
Rated Power Source	120 V
Remote Control Battery Type / Quantity	AAA Alkaline / 3 units
Seat Weight Limit	397 lb / 180 kg
Lid Weight Limit	264 lb / 120 kg
Deodorizer Filter Type / Filter Life	Carbon / 6 months

**NOTE:** The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

# Brondell®

<b>Weight and Dimensions</b>	
Dimensions (L x W x H)	Elongated: 20.7" x 15" x 3.9" / 52.6 cm x 38.1 cm x 9.9 cm Round: 19.6" x 15" x 3.9" / 49.8 cm x 38.1 cm x 9.9 cm
Seat Thickness	1" / 2.5 cm
Bidet Hose Length	23.6" / 60 cm
Bidet Hose Connection Size	½" x ½"
T-Valve Connection Size	⅜" x ⅜" x ½"
Weight	Elongated: 8.7 lb / 3.9 kg Round: 8.6 lb / 3.9 kg

<b>Warm Water Washing Device</b>	
Supply Water Pressure	7.11 psi–106.7 psi / 0.05 MPa–0.74 MPa
Incoming Water Temperature	50°F–89.6°F / 10°C–32°C
Default Cycle Time	2 minutes
Water Pressure Control	5 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Max Heater Power Consumption	1400 W

<b>Heated Seat and Air Dryer</b>	
Seat Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 98.6°F / 37°C; High - 104°F / 40°C
Number of Dryer Settings	5 levels
Default Dryer Cycle Time	2 minutes

<b>Required Measurements</b>	
<p><b>A.</b> Center of bolt holes to front of toilet bowl Elongated: 17.7"–18.5" / 44.9 cm–47 cm Round: 16.9"–17.5" / 42.9 cm–44.5 cm</p> <p><b>B.</b> Distance from center of bolt holes to toilet seat tank All models: Minimum 2" / 5.1 cm If the distance from the center of the bolt holes to the toilet tank is less than 2 inches, the Swash may extend slightly over the front edge of your toilet bowl.</p> <p><b>C.</b> Distance between bolt holes All models: 5.3"–7.7" / 13.5 cm–19.5 cm</p> <p><b>D.</b> Measure the distance from the front of the toilet tank to the front of the toilet bowl. If this measurement is less than 20 inches, the seat will extend over the front edge of the toilet. Consider purchasing a Round size to reduce the amount the seat extends over the front edge.</p>	



**NOTE:** The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

#22CL2200\_0719

**Brondell®**  
Feels better already.

Brondell, Inc.  
PO Box 470085  
San Francisco, CA 94147  
brondell.com