


Brondell®

Swash EM617 Advanced Bidet Toilet Seat with Remote Control

Models: EM617-EW, EM617-RW

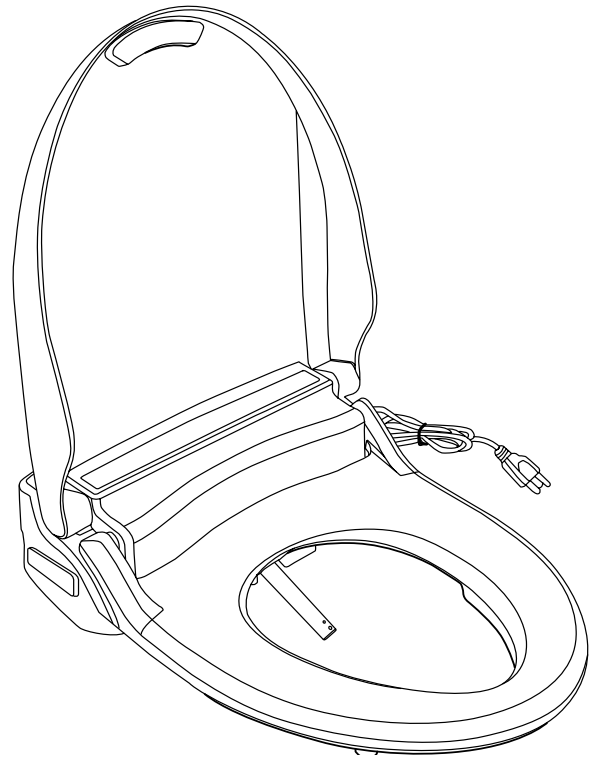

Features

- Adjustable, 5-position stainless steel nozzle
- Nozzle oscillation, gentle, strong, and pulse wash modes
- Fully adjustable water pressure and temperature
- Four-level heated seat and 5-level warm air dryer with temperature control
- Hybrid Water Heating System
- Gentle-closing seat and lid
- LED nightlight with on/off option
- Wireless remote control
- On-demand, self-cleaning nozzle
- 1-year limited warranty provided by US-based customer service team

Technical Specifications

Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	870 W
Power Cord Length	47" / 119.38 cm
Rated Power Source	120 V
Remote Control Battery Type / Quantity	AAA Alkaline / 4 units
Seat Weight Limit	330 lb / 149.69 kg
Lid Weight Limit	160 lb / 72.57 kg



NOTE: The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

#23EM617_0322

Brondell®
Feels better already.

Brondell, Inc.
PO Box 470085
San Francisco, CA 94147
brondell.com

Brondell®

Weight and Dimensions	
Dimensions (L x W x H)	Elongated: 20.79" x 18.5" x 5.71" / 52.58 cm x 47 cm x 14.48 cm Round: 19.53" x 18.5" x 5.71" / 49.61 cm x 47 cm x 14.48 cm
Seat Thickness	1.4" / 3.56 cm
Bidet Hose Length	25" / 63.5 cm
Bidet Hose Connection Size	1/2" x 1/2"
T-Valve Connection Size	7/8" x 7/8" x 1/2"
Weight	Elongated: 11.9 lb / 5.4 kg Round: 11.46 lb / 5.2 kg

Warm Water Washing Device	
Supply Water Pressure	9.95 psi-106.67 psi / 0.07 MPa-0.74 MPa
Incoming Water Temperature	37.4°F-104°F / 3°C-40°C
Flow Rate	Rear Wash: 0.13-0.21 gal/min / 0.5-0.8 L/min Front Wash: 0.13-0.18 gal/min / 0.5-0.7 L/min Strong Wash: 0.13-0.16 gal/min / 0.5-0.6 L/min
Default Cycle Time	2 minutes
Water Pressure Control	5 levels
Water Temperature Control	4 levels: OFF - Room Temp; Low - 91.4°F / 33°C; Medium - 96.8°F / 36°C; High - 102.2°F / 39°C
Max Heater Power Consumption	800 W
Safety Devices	Thermal Fuse, Thermostat, Water Level Sensor, Thermal Sensor, Bi-metal

Heated Seat and Air Dryer	
Seat Temperature Control	4 levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 100.4°F / 38°C; High - 107.6°F / 42°C
Number of Dryer Settings	5 levels
Default Dryer Cycle Time	2 minutes
Max Seat Heater Power Consumption	55 W
Safety Devices	Thermostat, Thermal Fuse, Thermal Sensor, Seat Occupied Sensor

Get the right fit.

- A. Center of bolt holes to front of toilet bowl
Elongated: 18"-19.5" / 45.7 cm-49.5 cm
Round: 16"-17.75" / 40.6 cm-45.1 cm
- B. Distance from center of bolt holes to toilet seat tank
All models: Minimum 1.5" / 3.81 cm
If the distance from the center of the bolt holes to the toilet tank is less than 1.5 inches, the Swash may extend slightly over the front edge of your toilet bowl.
If the distance from the center of the bolt holes to the toilet tank is less than 2 inches, the Swash may extend slightly over the front edge of your toilet bowl.
- C. Distance between bolt holes
All models: 5.25"-7.45" / 13.3 cm-18.9 cm
- D. Measure the distance from the front of the toilet tank to the front of the toilet bowl.
If this measurement is less than 20 inches, the seat will extend over the front edge of the toilet.
Consider purchasing a Round size to reduce the amount the seat extends over the front edge.

